


技术要求

1.

2.

30 /

480 /


3.

4.

6-13.7

5.


10-36V

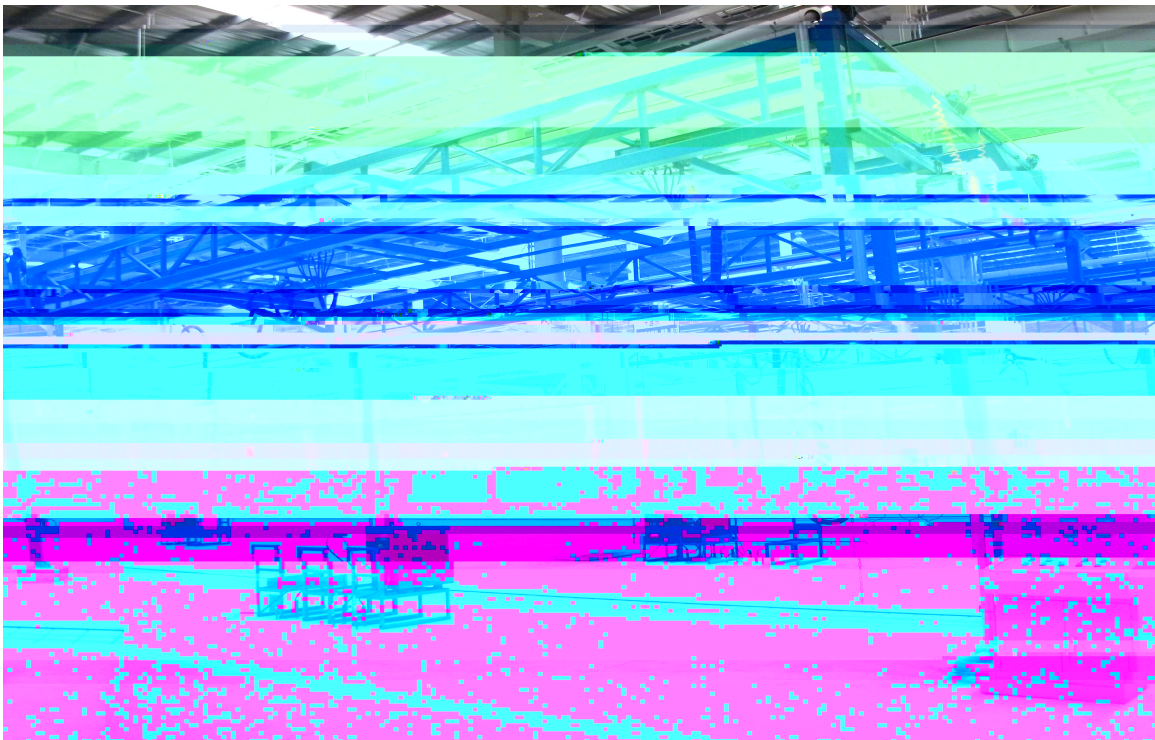

2


1

2m n

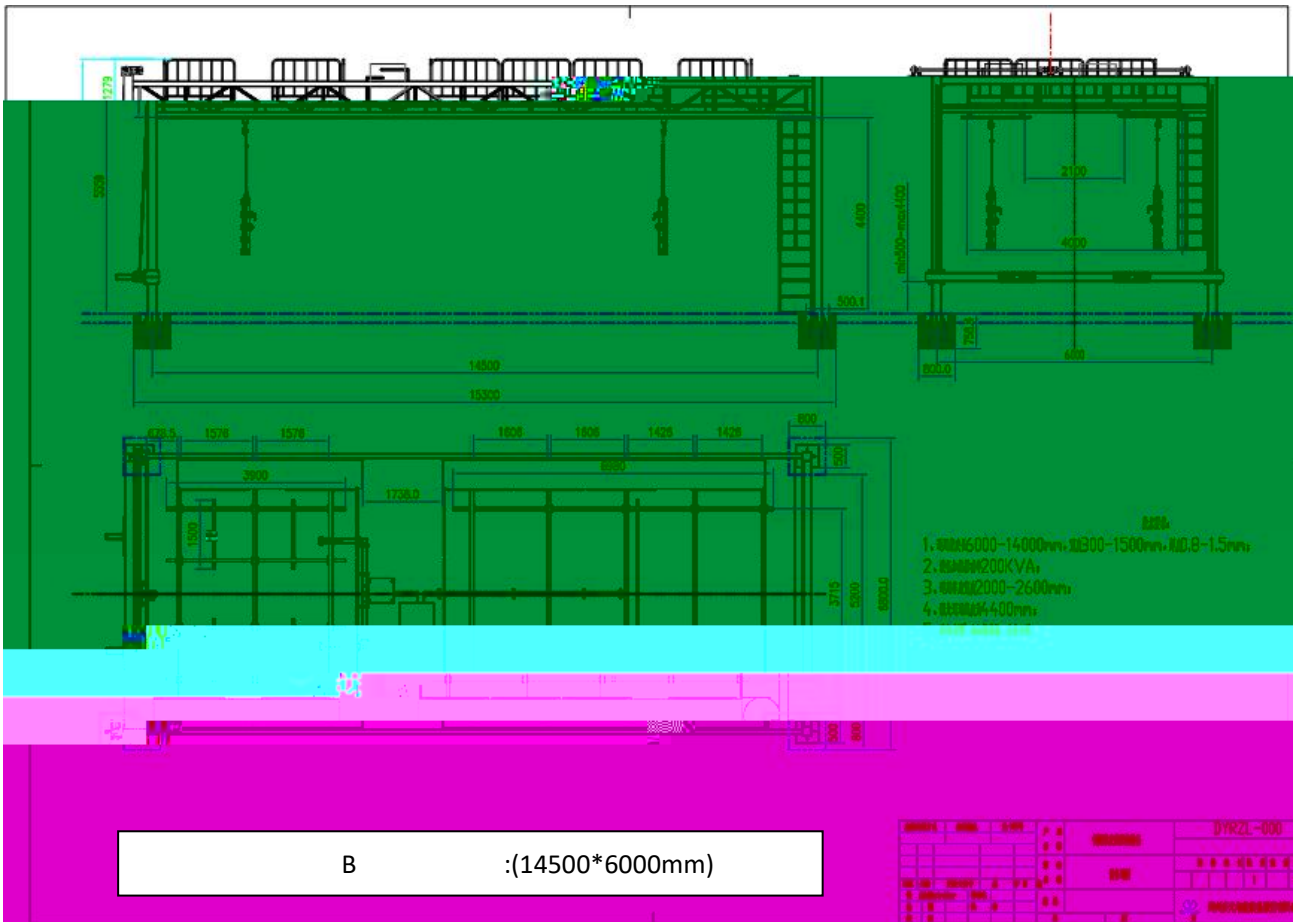

1

1.1

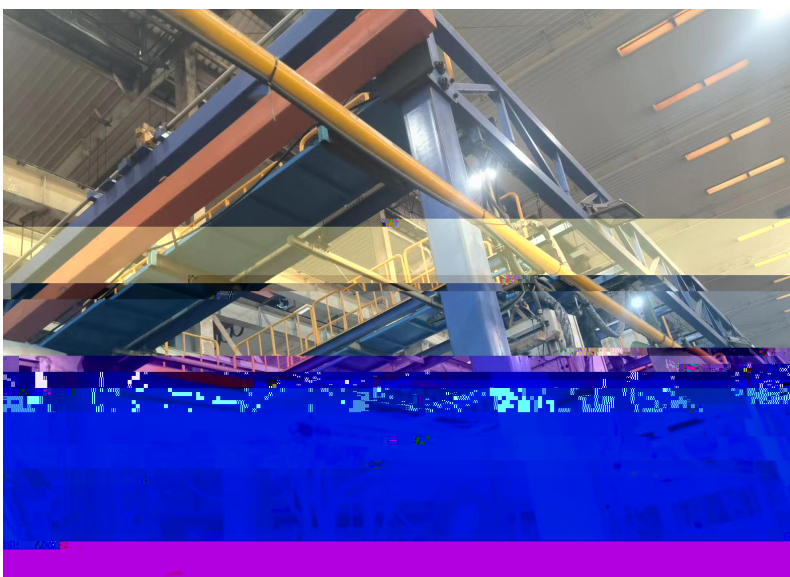

1.2

12

350 1200mm

1 1.2mm

2

2.1

2.1.1

2.2

2.2.1


2.2.2

2.2.3

1

380V

25. 5V

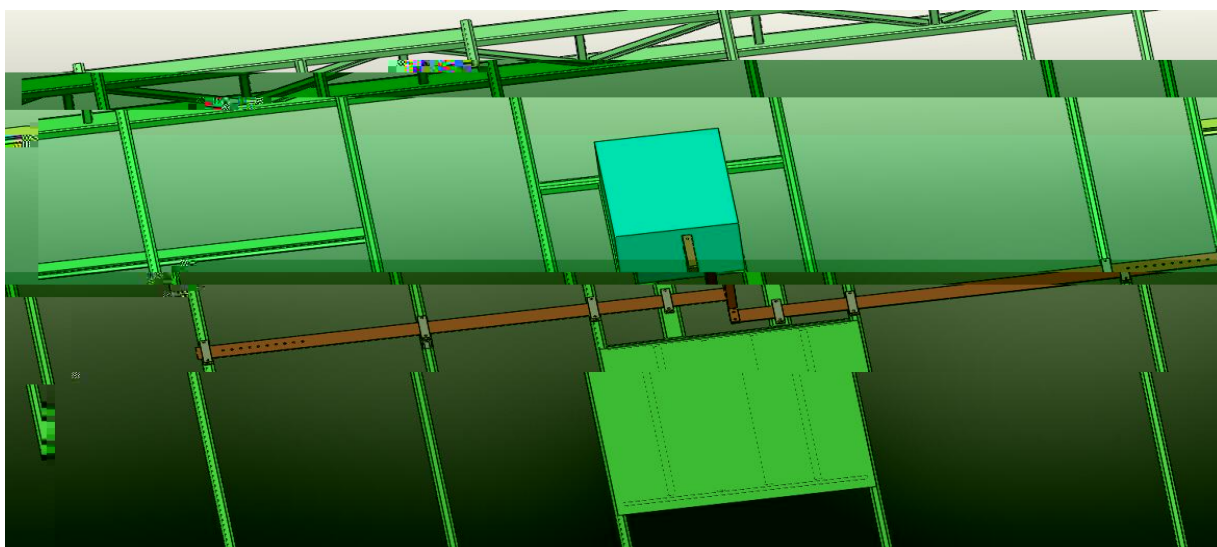

2.3

2.3.1


SE125*200

6000N

0.6MPa

2.3.2

2.3.3

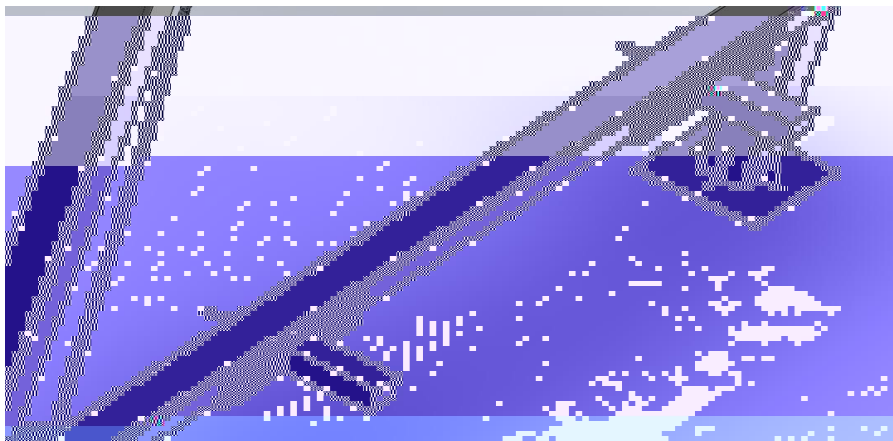

2.3.4



2 4

2 4. 1

2 5

2 5. 1


2 5. 2

2 5. 3

2 5. 4



2 5. 5

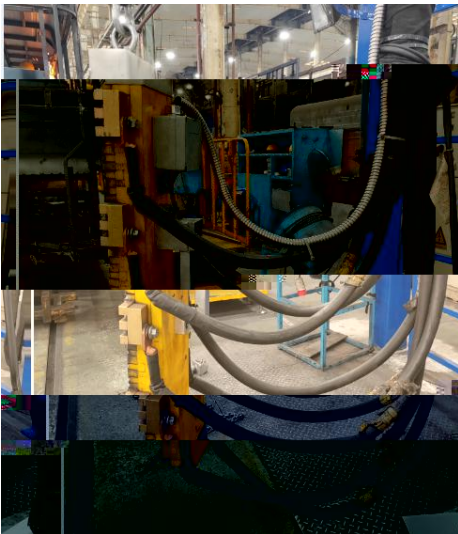

2 6

2.6.1

2.6.2

e

- 3.1 350mm 1200mm 20mm
- 20mm
- 3.2 2500mm 12000mm
- 3.3 1mm/1000mm
- 3.4 2600mm
- 3.5 280mm
- 3.6 80 120
- 3.7 0-180s ()
- 3.8 6000N
- 3.9 160KVA
- 3.10 1900mm± 2600mm 2700- 4200mm 6000- 13700mm
- 3.11 4400mm
- 3.12 30 / .
- 3.13 6-13.7

- 3.14 14500mm 6000mm 5600mm

4

1				1		
2				2		
3		SE125* 200		2		
4		GC400- 15		1		
5		4HV430- 15L		2		
6				1		
7		WPVDS80- 60- C		1		1. 5kw
8		16A		2		
9				1		

10		200Kg		4	
11		1T		4	
12		GDF6000A		1	
13		120mm ²		1	
14				1	

5

1		SE125* 200		
2		GC400- 15		
3		4HV430- 15L		
4		16A		
5		UCP207		
6		WPVDS80- 60- C		1. 5kw
7		6305- 2z		
8		GDF6000A		
9		200kg		
10		MPS-224TSNPO P/N 1053841 2407	SICK	

1	PLC	DVP32ES2		
2		DOP107		
3		C65N- 32- 3P		
4		EZD- 400A		
5		XB2BVB4LC		
6		XB2BA42C		
8		XB2BS542C		
9		RXM4AB2BD		
10		XB2BS542C		
11		220/24- 120W		

1

1

150A

2

2

5

3

4

5

3

